



Floor Springs

KENWA
<http://www.kenwa.co.jp>

NH[®] 700 SERIES



MODEL 703 • 704

DATA AND FEATURES

Closing force	EN1154:1966+A1:2002/AC:2006	2/3/4/5	Cam-action	●
Standard doors	≤ 850mm ≤ 70kg	702	Dual door opening angle	130°
	≤ 950mm ≤ 100kg	703 CE	Closing speed adjustable	●
	≤ 1100mm ≤ 150kg	704 CE	Latching speed adjustable	●
	≤ 1250mm ≤ 200kg	705	Hold-open	without hold-open ● at 90° hold-open ○ at 105° hold-open ○
Body dimensions (mm)	Length	306	Non-handed	●
	Width	108	Extended spindle	+5, +7.5, +10, +15, +20, +25 +30, +35, +40, +45, +50 mm ○
	Thick	40		
Arm	Standard	○		
	Offset arm	○		

● = yes ○ = option

ACCESSORIES

STANDARD STRAP,
TOP AND BOTTOM PIVOT (DMA)



STANDARD STRAP,
TOP AND BOTTOM PIVOT (NSA)



OFFSET PIVOT





Floor Springs

NN[®] 700 SERIES




<http://www.kenwa.co.jp>

ADJUSTMENT



Complete speed control

The closing speed and the latching speed can be controlled via two independent valves.

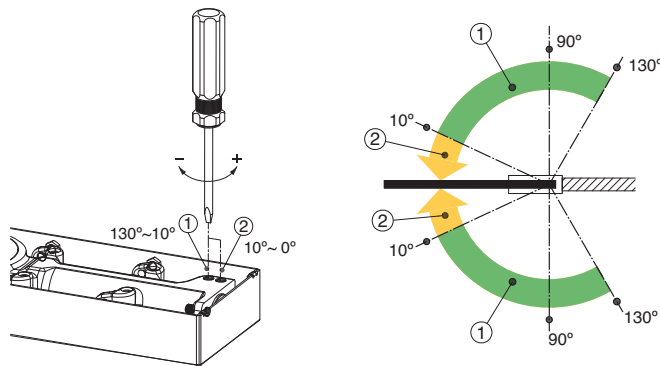

INSTALLATION


FITTING TO A DOUBLE ACTION DOOR

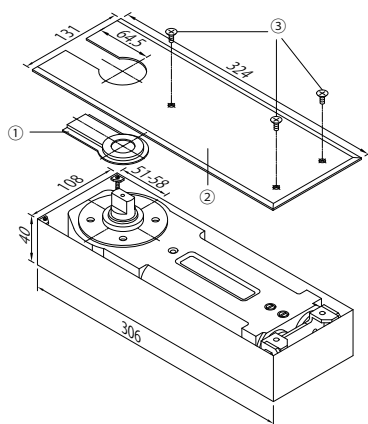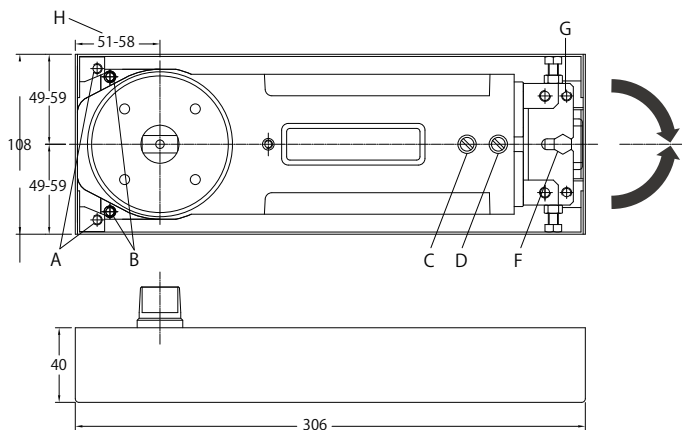

- A = Fixing screw
- B = Height adjustment screw
- C = Regulation valve 130°~10°
- D = Regulation valve 10°~0°
- F = Fixing screw
- G = Height adjustment screw
- H = Pivot centre

- ① = Insert piece
- ② = Cover plate
- ③ = Fixing screw M5x6

ACCESSORIES FOR DOUBLE ACTION ALUMINIUM AND WOODEN DOORS

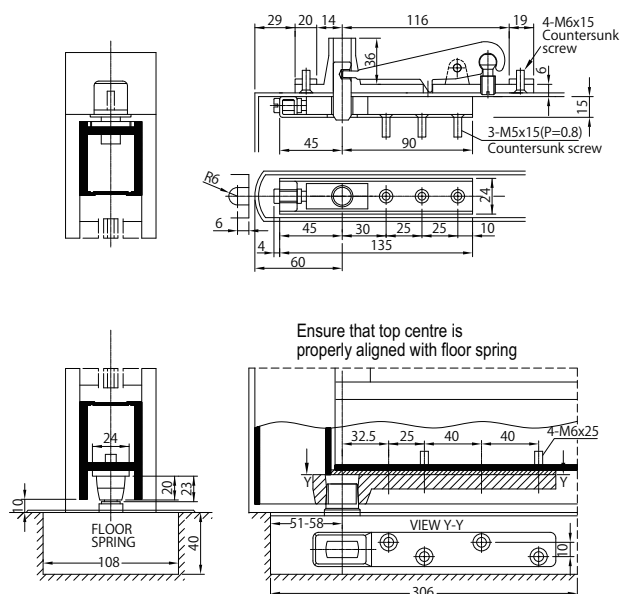

KENWA CO., LTD. **NN[®]**
Closing Solutions

TOWER WEST 12FL, UMEDA SKY BUILDING, 1-1-30,
OYODO-NAKA, KITA-KU, OSAKA 531-0076 JAPAN

Phone: 81-(0)6-6454-9721

Facsimile: 81-(0)6-6454-9727

E-Mail: info@kenwa.co.jp <http://www.kenwa.co.jp>

<http://www.micomautodoor.com>

E.&O.E.

All sizes, photo's and drawings are subject to change without prior notice.

Copyright © 2013 KENWA CO.,LTD. OSAKA JAPAN All Rights Reserved.

DISTRIBUTED BY